

NEW DUCATO

CONVERSION VEHICLES

Trim levels and options may vary in response to specific legal or market requirements. The information in this publication is purely indicative. Fiat reserves the right to make any changes to the models described in this publication at any time for technical or market reasons.
Fiat Marketing 02.3.0943.08 - S - 09/2011 - Printed in Italy - Tipolitografica CS (PD).
Publication printed on chlorine-free paper.

www.fiatprofessional.com



TECHNICAL SPECIFICATIONS AND STANDARD EQUIPMENT





TECHNICAL SPECIFICATIONS.

NEW DUCATO CHASSIS CABS - COWLS

Engine	115 Multijet	130 Multijet	150 Multijet	180 Multijet Power
Number of cylinders, arrangement	4 in line	4 in line	4 in line	4 in line
Displacement (cm³)	1956	2287	2287	2999
Compression ratio	16.5:1	16.2:1	16.2:1	17.5:1
EC max. power: kW (HP) at rpm	85 (115) 3700	96 (130) 3600	109 (148) 3600	130 (177) 3500
EC max torque: Nm (kgm) at rpm	280 (28.5) 1500	320 (32.6) 1800	350 (35.7) 1500	400 (40.8) 1400
Emissions level	Euro 5	Euro 5	Euro 5	Euro 5
Timing system (control)	2 OHC (toothed drive belt)	2 OHC (toothed drive belt)	2 OHC (toothed drive belt)	2 OHC (chain drive)
Fuel supply	electronically controlled Common Rail Multijet II direct injection with turbocharger and intercooler	electronically controlled Common Rail Multijet II direct injection with turbocharger and intercooler	electronically controlled Common Rail Multijet II direct injection with variable geometry turbocharger and intercooler	electronically controlled Common Rail Multijet direct injection with variable geometry turbocharger and intercooler
Ignition	compression	compression	compression	compression
Transmission				
Traction	front drive	front drive	front drive	front drive
Clutch	single disc and hydraulic release device	single disc and hydraulic release device	single disc and hydraulic release device	single disc and hydraulic release device
Gearbox: number of gears	5 + RM	6 + RM	6 + RM	6 + RM
Reduction ratios				
1 st	4.167 :1	3.727 : 1	3.727 : 1	4.167 : 1
2 nd	2.350 :1	1.952 : 1	1.952 : 1	2.350 : 1
3 rd	1.462 :1	1.290 : 1	1.290 : 1	1.462 : 1
4 th	0.955 :1	0.875 : 1	0.875 : 1	0.955 : 1
5 th	0.695 :1	0.673 : 1	0.673 : 1	0.695 : 1
6 th	-	0.585 : 1	0.585 : 1	0.552 : 1
Reverse	4.083 :1	3.154 : 1	3.154 : 1	4.083 : 1
Final drive ratio	4.867 :1	4.933 : 1 (74/15) 5.231 : 1 (68/13) Maxi	4.933 : 1 (74/15) 5.231 : 1 (68/13) Maxi	4.222 : 1 (76/18) 4.563 : 1 (73/16) Maxi
Steering system				
Type	rack and pinion, power assisted	rack and pinion, power assisted	rack and pinion, power assisted	rack and pinion, variable power-assisted (Servotronic)
Turning circle (kerb to kerb)	Short wheelbase m 11 - Medium wheelbase m 12.46 - Medium-to-long wheelbase m 13.54 - Long wheelbase m 14.28			
Braking system - D (disc)				
Type	dual H-I circuit; front and rear disc brakes. ABS and Electronic Brake-force Distribution corrector (EBD)			
Front: B mm	D 280 self-ventilated	D 280 self-ventilated D 300 (self-ventilated) Maxi	D 280 self-ventilated D 300 (self-ventilated) Maxi	D 280 self-ventilated D 300 (self-ventilated) Maxi
Rear: B mm	D 280	D 280	D 280	D 280
Brake servo: B	11"	11"	11"	11"
Suspensions				
Front	independent, McPherson type with track control arms, coil springs, telescopic shock absorbers and anti-roll bar			
Rear	rigid tubular axle type with parabolic longitudinal leaf springs, telescopic shock absorbers and flexible side buffers			
Wheels				
Tyres	215/70 R 15 C (225/70 R 15 C optional), Maxi : 215/75 R 16 C on 35 q. - 225/75 R 16 C on 40 q. (opt. on 35 Maxi)			
Electrical system (12 V)				
Battery capacity (Ah)	95	95	95	110
Weights - Capacities				
Max towable weight (braked) (kg)	2000	2500	2500	2500
Fuel tank capacity (litres)	90	90	90	90
Performance				
Maximum speed (km/h)	135-140	145-155	152-162	161-171

CHASSIS CABS.

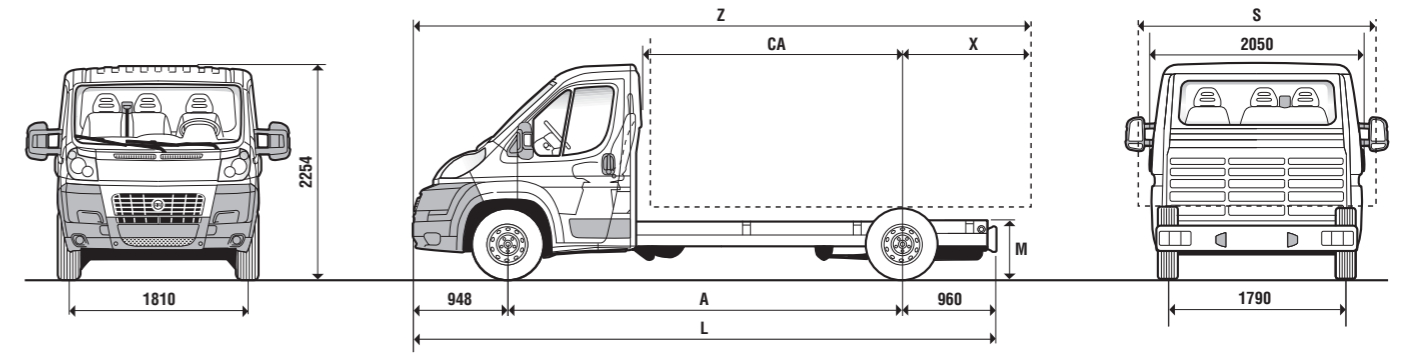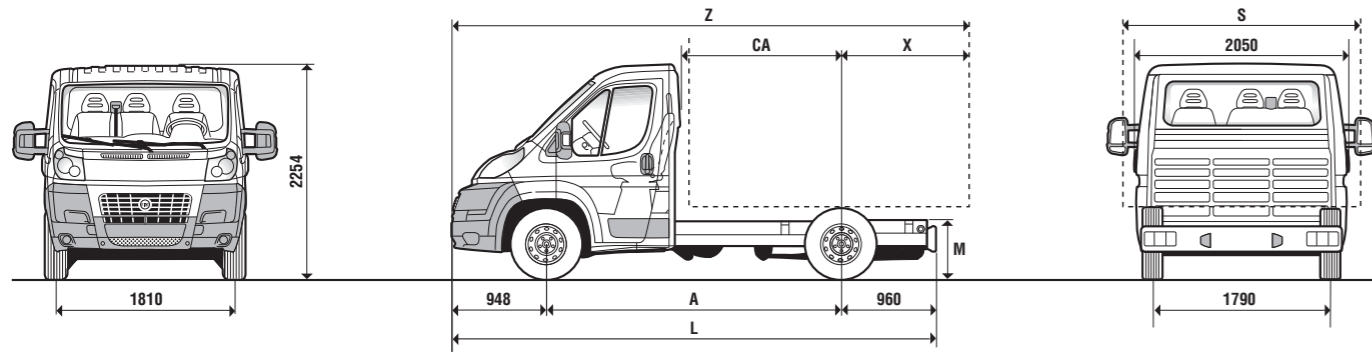

Dimensions mm	Chassis cab 30			Chassis cab 33			Chassis cab 35		
	3000	3450	3800	3000	3450	3800	3000	3450	3800
A Wheelbase	3000	3450	3800	3000	3450	3800	3000	3450	3800
L Maximum length	4908	5358	5708	4908	5358	5708	4908	5358	5708
Maximum width	2050	2050	2050	2050	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790	1790	1790	1790
Maximum height (when unladen)	2254	2254	2254	2254	2254	2254	2254	2254	2254
Front projection	948	948	948	948	948	948	948	948	948
Rear projection	960	960	960	960	960	960	960	960	960
M Chassis height (STDA)	650	650	650	650	650	650	650	650	650
X Rear axle span flush with the body (finished trim projection limit)	1800	2070	2280	1800	2070	2280	1800	2070	2280
CA Rear axle span behind cabin	1610	2060	2410	1610	2060	2410	1610	2060	2410
S Max practicable width*	2350	2350	2350	2350	2350	2350	2350	2350	2350
Z Max length with trim	5748	6468	7028	5748	6468	7028	5748	6468	7028

Dimensions mm	Chassis cab 33			Chassis cab 35		
	4035	4035	4035 XL	4035	4035	4035 XL
A Wheelbase	4035	4035	4035 XL	4035	4035	4035 XL
L Maximum length	5943	5943	6308	5943	5943	6308
Maximum width	2050	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
Maximum height (when unladen)	2254	2254	2254	2254	2254	2254
Front projection	948	948	948	948	948	948
Rear projection	960	960	960	960	960	960
M Chassis height (STDA)	650	650	650	650	650	650
X Rear axle span flush with the body (finished trim projection limit)	2400	2400	2400	2400	2400	2400
CA Rear axle span behind cabin	2645	2645	2645	2645	2645	2645
S Max practicable width*	2350	2350	2350	2350	2350	2350
Z Max length with trim	7383	7383	7383	7383	7383	7383

Wheelbase 3000 mm	Chassis cab 30				Chassis cab 33				Chassis cab 35			
	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1590	1605	1605	1655	1590	1605	1605	1655	1590	1605	1605	1655
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500
Max permitted weight on the front axle (kg)	1630	1630	1630	1630	1750	1750	1750	1750	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	1650	1650	1650	1650	1900	1900	1900	1900	2000	2000	2000	2000

Wheelbase 4035 mm	Chassis cab 33				Chassis cab 35			
	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1640	1655	1655	1705	1640	1655	1655	1705
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Max permitted weight on the front axle (kg)	1750	1750	1750	1750	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	1900	1900	1900	1900	2000	2000	2000	2000

Wheelbase 3450 mm	Chassis cab 30				Chassis cab 33				Chassis cab 35			
	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1620	1635	1635	1685	1620	1635	1635	1685	1620	1635	1635	1685
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500
Max permitted weight on the front axle (kg)	1630	1630	1630	1630	1750	1750	1750	1750	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	1650	1650	1650	1650	1900	1900	1900	1900	2000	2000	2000	2000

Wheelbase 4035 mm XL	Chassis cab 35			
	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1655	1670	1670	1720
GVW (kg)	3500	3500	3500	3500
Max permitted weight on the front axle (kg)	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	2000	2000	2000	2000

Wheelbase 3800 mm	Chassis cab 30	Chassis cab 30				Chassis cab 35			
	115 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	115 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1630	1630	1645	1645	1695	1630	1645	1645	1695
GVW (kg)	3000	3300	3300	3300	3300	3500	3500	3500	3500
Max permitted weight on the front axle (kg)	1630	1750	1750	1750	1750	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	1650	1900	1900	1900	1900	2000	2000	2000	2000



* Linked to rear view mirrors opt 042 – 2200 mm with opt 036 – 2100 mm with standard rear view mirrors

▲ Kerb weight with supplies, spare wheel, tools and accessories

* Linked to rear view mirrors opt 042 – 2200 mm with opt 036 – 2100 mm with standard rear view mirrors

▲ Kerb weight with supplies, spare wheel, tools and accessories

MAXI CHASSIS CABS.

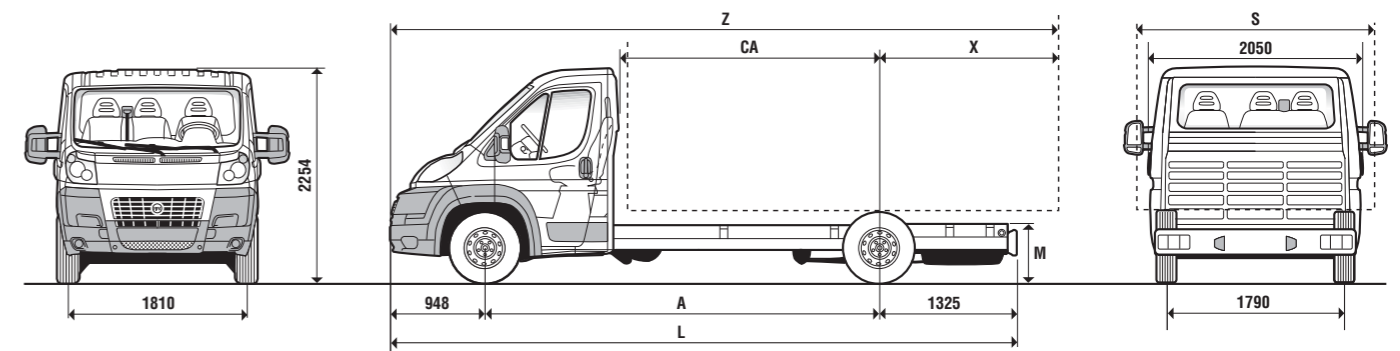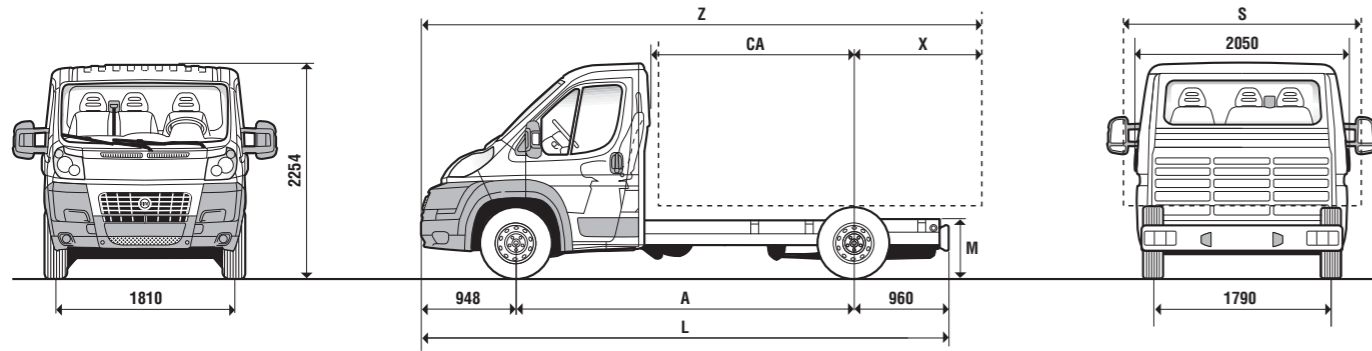

Dimensions mm	Maxi chassis cab 35			Maxi chassis cab 40		
	3450	3800		3450	3800	
A Wheelbase	3450	3800		3450	3800	
L Maximum length	5358	5708		5358	5708	
Maximum width	2050	2050		2050	2050	
Front track	1810	1810		1810	1810	
Rear track	1790	1790		1790	1790	
Maximum height (when unladen)	2254	2254		2254	2254	
Front projection	948	948		948	948	
Rear projection	960	960		960	960	
M Chassis height (STDA)	650	650		650	650	
X Rear axle span flush with the body (finished trim projection limit)	2070	2280		2070	2280	
CA Rear axle span behind cabin	2060	2410		2060	2410	
S Max practicable width*	2350	2350		2350	2350	
Z Max length with trim	6468	7028		6468	7028	

Dimensions mm	Maxi chassis cab 35			Maxi chassis cab 40		
	4035	4035 XL		4035	4035 XL	
A Wheelbase	4035	4035 XL		4035	4035 XL	
L Maximum length	5943	6308		5943	6308	
Maximum width	2050	2050		2050	2050	
Front track	1810	1810		1810	1810	
Rear track	1790	1790		1790	1790	
Maximum height (when unladen)	2254	2254		2254	2254	
Front projection	948	948		948	948	
Rear projection	960	1325		960	1325	
M Chassis height (STDA)	650	650		650	650	
X Rear axle span flush with the body (finished trim projection limit)	2400	2400		2400	2400	
CA Rear axle span behind cabin	2645	2645		2645	2645	
S Max practicable width*	2350	2350		2350	2350	
Z Max length with trim	7383	7383		7383	7383	

Wheelbase 3450 mm	Maxi chassis cab 35			Maxi chassis cab 40		
	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight [▲] (tare) (kg)	1675	1675	1725	1675	1675	1725
GVW (kg)	3500	3500	3500	4005	4005	4005
Max permitted weight on the front axle (kg)	2100	2100	2100	2100	2100	2100
Max permitted weight on the rear axle (kg)	2400	2400	2400	2400	2400	2400

Wheelbase 4035 mm	Maxi chassis cab 35			Maxi chassis cab 40		
	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight [▲] (tare) (kg)	1695	1695	1745	1695	1695	1745
GVW (kg)	3500	3500	3500	4005	4005	4005
Max permitted weight on the front axle (kg)	2100	2100	2100	2100	2100	2100
Max permitted weight on the rear axle (kg)	2400	2400	2400	2400	2400	2400

Wheelbase 3800 mm	Maxi chassis cab 35			Maxi chassis cab 40		
	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight [▲] (tare) (kg)	1685	1685	1735	1685	1685	1735
GVW (kg)	3500	3500	3500	4005	4005	4005
Max permitted weight on the front axle (kg)	2100	2100	2100	2100	2100	2100
Max permitted weight on the rear axle (kg)	2400	2400	2400	2400	2400	2400

Wheelbase 4035 mm XL	Maxi chassis cab 35			Maxi chassis cab 40		
	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight [▲] (tare) (kg)	1710	1710	1760	1710	1710	1760
GVW (kg)	3500	3500	3500	4000	4000	4000
Max permitted weight on the front axle (kg)	2100	2100	2100	2100	2100	2100
Max permitted weight on the rear axle (kg)	2400	2400	2400	2400	2400	2400


* Linked to rear view mirrors opt 042 – 2200 mm with opt 036 – 2100 mm with standard rear view mirrors

▲ Kerb weight with supplies, spare wheel, tools and accessories

* Linked to rear view mirrors opt 042 – 2200 mm with opt 036 – 2100 mm with standard rear view mirrors

▲ Kerb weight with supplies, spare wheel, tools and accessories

CHASSIS CREW CABS.

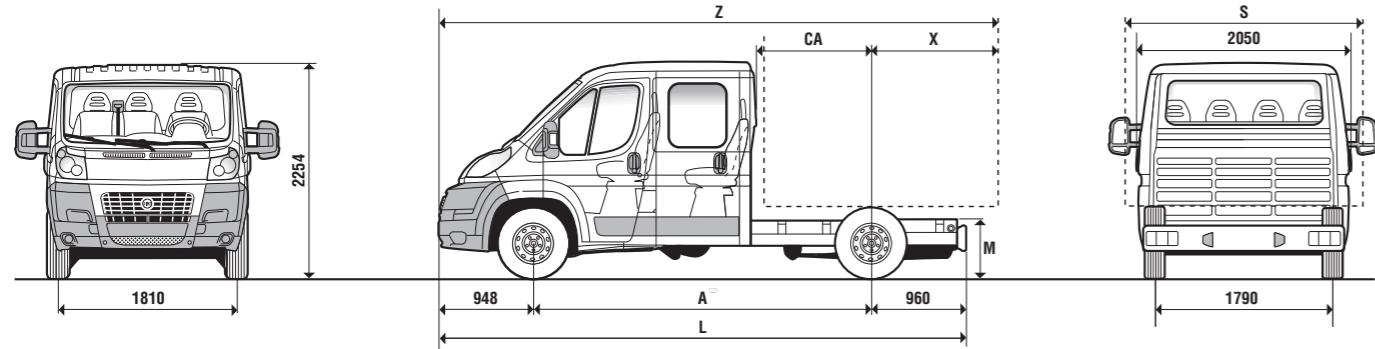

Dimensions mm	Chassis crew cab 33				Chassis crew cab 35			
	3450	4035	3450	4035	3450	4035	3450	4035
A Wheelbase	3450	4035	3450	4035	3450	4035	3450	4035
L Maximum length	5358	5943	5358	5943	5358	5943	5358	5943
Maximum width	2050	2050	2050	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790	1790	1790
Maximum height (when unladen)	2254	2254	2254	2254	2254	2254	2254	2254
Front projection	948	948	948	948	948	948	948	948
Rear projection	960	960	960	960	960	960	960	960
M Chassis height (STDA)	719	719	719	719	719	719	719	719
X Rear axle span flush with the body (finished trim projection limit)	2070	2400	2070	2400	2070	2400	2070	2400
CA Rear axle span behind cabin	1190	1774	1190	1774	1190	1774	1190	1774
S Max practicable width*	2350	2350	2350	2350	2350	2350	2350	2350
Z Max length with trim	6468	7383	6468	7383	6468	7383	6468	7383


Wheelbase 3450 mm	Chassis crew cab 33				Chassis crew cab 35			
	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1795	1810	1810	1860	1795	1810	1810	1860
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Max permitted weight on the front axle (kg)	1850	1850	1850	1850	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	1900	1900	1900	1900	2000	2000	2000	2000

Wheelbase 4035 mm	Chassis crew cab 33				Chassis crew cab 35		
	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet
Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet
Vehicle weight▲(tare) (kg)	1825	1840	1840	1890	1825	1840	1840
GVW (kg)	3300	3300	3300	3300	3300	3300	3300
Max permitted weight on the front axle (kg)	1850	1850	1850	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	1900	1900	1900	1900	1900	1900	1900

* Linked to rear view mirrors opt 042 – 2200 mm with opt 036 – 2100 mm with standard rear view mirrors

▲ Kerb weight with supplies, spare wheel, tools and accessories

MAXI CHASSIS CREW CABS.

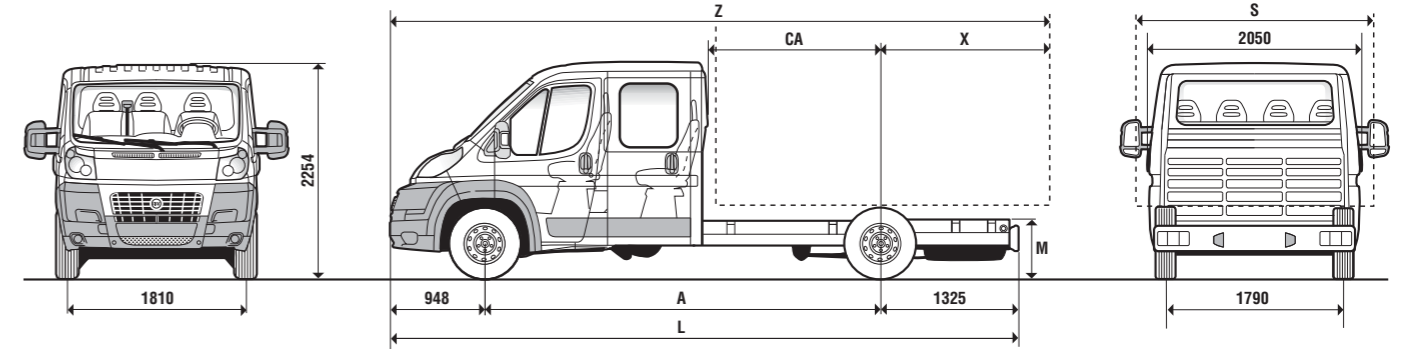

Dimensions mm	Maxi chassis crew cab 35			Maxi chassis crew cab 40		
	3450	4035	4035 XL	3450	4035	4035 XL
A Wheelbase	3450	4035	4035 XL	3450	4035	4035 XL
L Maximum length	5358	5943	6308	5358	5943	6308
Maximum width	2050	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
Maximum height (when unladen)	2254	2254	2254	2254	2254	2254
Front projection	948	948	948	948	948	948
Rear projection	960	960	1325	960	960	1325
M Chassis height (STDA)	719	719	719	719	719	719
X Rear axle span flush with the body (finished trim projection limit)	2070	2400	2400	2070	2400	2400
CA Rear axle span behind cabin	1190	1774	1774	1190	1774	1774
S Max practicable width*	2350	2350	2350	2350	2350	2350
Z Max length with trim	6468	7383	7383	6468	7383	7383

Wheelbase 3450 mm	Maxi chassis crew cab 35		
	130 Multijet	150 Multijet	180 Multijet
Engine versions	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1850	1850	1900
GVW (kg)	3500	3500	3500
Max permitted weight on the front axle (kg)	2100	2100	2100
Max permitted weight on the rear axle (kg)	2400	2400	2400


Wheelbase 4035 mm	Maxi chassis crew cab 35			Maxi chassis crew cab 40		
	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1880	1880	1930	1880	1880	1930
GVW (kg)	3500	3500	3500	4005	4005	4005
Max permitted weight on the front axle (kg)	2100	2100	2100	2100	2100	2100
Max permitted weight on the rear axle (kg)	2400	2400	2400	2400	2400	2400

Wheelbase 4035 mm XL	Maxi chassis crew cab 35			Maxi chassis crew cab 40		
	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1900	1900	1950	1900	1900	1950
GVW (kg)	3500	3500	3500	4005	4005	4005
Max permitted weight on the front axle (kg)	2100	2100	2100	2100	2100	2100
Max permitted weight on the rear axle (kg)	2400	2400	2400	2400	2400	2400

* Linked to rear view mirrors opt 042 – 2200 mm with opt 036 – 2100 mm with standard rear view mirrors

▲ Kerb weight with supplies, spare wheel, tools and accessories

CHASSIS CAB WITH PLATFORM.

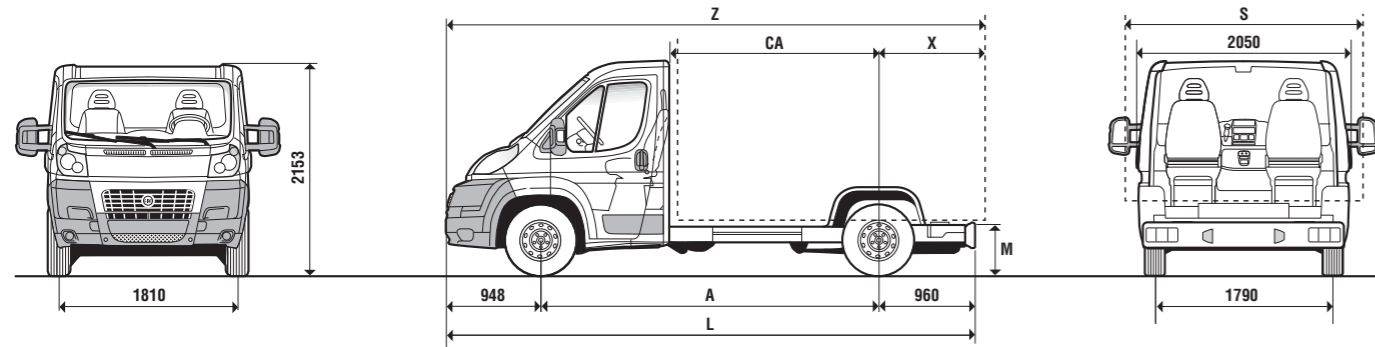

Dimensions mm	Chassis cab with platform 30		Chassis cab with platform 33			Chassis cab with platform 35			
A Wheelbase	3000	3450	3000	3450	4035	3000	3450	4035	4035 XL
L Maximum length	4908	5358	4908	5358	5943	4908	5358	5943	6308
Maximum width	2050	2050	2050	2050	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790	1790	1790	1790
Maximum height (when unladen)	2153	2153	2153	2153	2153	2153	2153	2153	2153
Front projection	948	948	948	948	948	948	948	948	948
Rear projection	960	960	960	960	960	960	960	960	1325
M Chassis height (STDA)	540	540	540	540	540	540	540	540	540
X Rear axle span flush with the body (finished trim projection limit)	1800	2070	1800	2070	2400	1800	2070	2400	2400
CA Rear axle span behind cabin	1610	2060	1610	2060	2645	1610	2060	2645	2645
S Max practicable width*	2350	2350	2350	2350	2350	2350	2350	2350	2350
Z Max length with trim	5748	6468	5748	6468	7383	5748	6468	7383	7383

Wheelbase 3000 mm	Chassis cab with platform 30				Chassis cab with platform 33				Chassis cab with platform 35			
Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1580	1595	1595	1645	1580	1595	1595	1645	1580	1595	1595	1645
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500
Max permitted weight on the front axle (kg)	1630	1630	1630	1630	1750	1750	1750	1750	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	1650	1650	1650	1650	1900	1900	1900	1900	2000	2000	2000	2000

Wheelbase 3450 mm	Chassis cab with platform 30				Chassis cab with platform 33				Chassis cab with platform 35			
Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1600	1615	1615	1665	1600	1615	1615	1665	1600	1615	1615	1665
GVW (kg)	3000	3000	3000	3000	3300	3300	3300	3300	3500	3500	3500	3500
Max permitted weight on the front axle (kg)	1630	1630	1630	1630	1750	1750	1750	1750	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	1650	1650	1650	1650	1900	1900	1900	1900	2000	2000	2000	2000


Wheelbase 4035 mm	Chassis cab with platform 33				Chassis cab with platform 35			
Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1615	1630	1630	1680	1615	1630	1630	1680
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Max permitted weight on the front axle (kg)	1750	1750	1750	1750	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	1900	1900	1900	1900	2000	2000	2000	2000

Wheelbase 4035 mm XL	Chassis cab with platform 35			
Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1630	1645	1645	1695
GVW (kg)	3500	3500	3500	3500
Max permitted weight on the front axle (kg)	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	2000	2000	2000	2000

* Linked to rear view mirrors opt 042 – 2200 mm with opt 036 – 2100 mm with standard rear view mirrors

▲ Kerb weight with supplies, spare wheel, tools and accessories

MAXI CHASSIS CABS WITH PLATFORM.

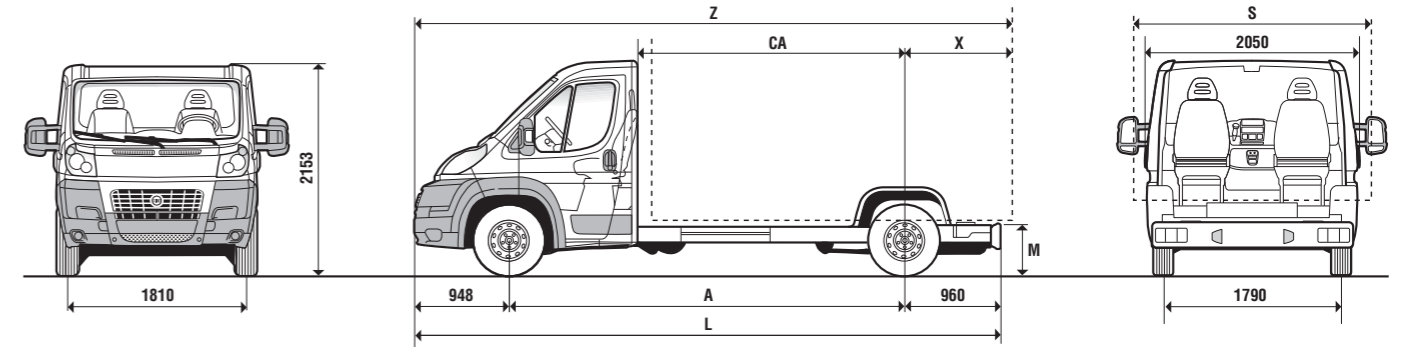

Dimensions mm	Maxi chassis cab with platform 35			Maxi chassis cab with platform 40		
A Wheelbase	3450	4035	4035 XL	3450	4035	4035 XL
L Maximum length	5358	5943	6308	5358	5943	6308
Maximum width	2050	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
Maximum height (when unladen)	2153	2153	2153	2153	2153	2153
Front projection	948	948	948	948	948	948
Rear projection	960	960	1325	960	960	1325
M Chassis height (STDA)	545	548	521	545	548	521
X Rear axle span flush with the body (finished trim projection limit)	2070	2400	2400	2070	2400	2400
CA Rear axle span behind cabin	2060	2645	2645	2060	2645	2645
S Max practicable width*	2350	2350	2350	2350	2350	2350
Z Max length with trim	6468	7383	7383	6468	7383	7383

Wheelbase 3450 mm	Maxi chassis cab with platform 35			Maxi chassis cab with platform 40		
Engine versions	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1655	1655	1705	1655	1655	1705
GVW (kg)	3500	3500	3500	4005	4005	4005
Max permitted weight on the front axle (kg)	2100	2100	2100	2100	2100	2100
Max permitted weight on the rear axle (kg)	2400	2400	2400	2400	2400	2400


Wheelbase 4035 mm	Maxi chassis cab with platform 35			Maxi chassis cab with platform 40		
Engine versions	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1670	1670	1720	1670	1670	1720
GVW (kg)	3500	3500	3500	4005	4005	4005
Max permitted weight on the front axle (kg)	2100	2100	2100	2100	2100	2100
Max permitted weight on the rear axle (kg)	2400	2400	2400	2400	2400	2400

Wheelbase 4035 mm XL	Maxi chassis cab with platform 35			Maxi chassis cab with platform 40		
Engine versions	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1685	1685	1735	1685	1685	1735
GVW (kg)	3500	3500	3500	4005	4005	4005
Max permitted weight on the front axle (kg)	2100	2100	2100	2100	2100	2100
Max permitted weight on the rear axle (kg)	2400	2400	2400	2400	2400	2400

* Linked to rear view mirrors opt 042 – 2200 mm with opt 036 – 2100 mm with standard rear view mirrors

▲ Kerb weight with supplies, spare wheel, tools and accessories

CHASSIS COWLS.

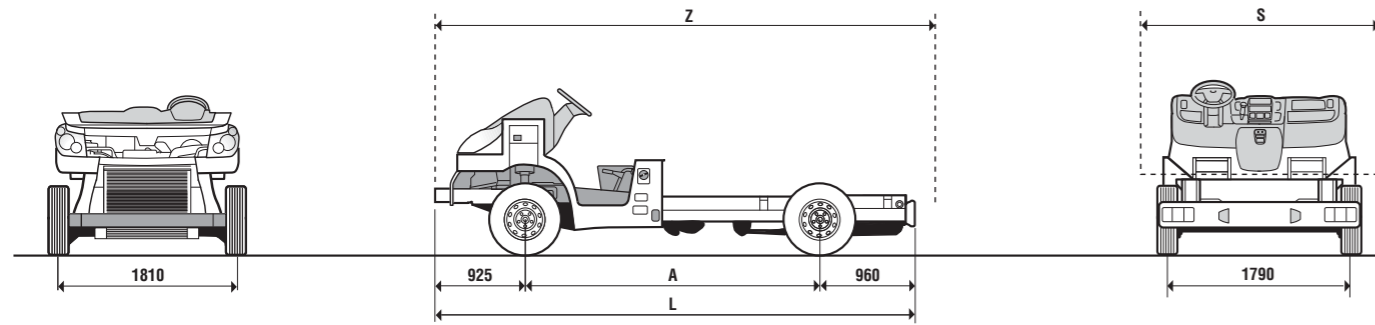

Dimensions mm	Chassis cowl 33		Chassis cowl 35			
	4035	3000	3450	3800	4035	4035 XL
A Wheelbase	4035	3000	3450	3800	4035	4035 XL
L Maximum length	5920	4885	5335	5685	5920	6285
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
Front projection	925	925	925	925	925	925
Rear projection	960	960	960	960	960	1325
S Max practicable width*	2350	2350	2350	2350	2350	2350
Z Max length with trim	7383	5748	6468	7028	7383	7748

Wheelbase 3000 mm	Chassis cowl 35			
	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1290	1305	1305	1355
GVW (kg)	3500	3500	3500	3500
Max permitted weight on the front axle (kg)	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	2000	2000	2000	2000

Wheelbase 3450 mm	Chassis cowl 35				Wheelbase 3800 mm	Chassis cowl 35			
	115 Multijet	130 Multijet	150 Multijet	180 Multijet		115 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet	Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1320	1335	1335	1385	Vehicle weight▲(tare) (kg)	1330	1345	1345	1395
GVW (kg)	3500	3500	3500	3500	GVW (kg)	3500	3500	3500	3500
Max permitted weight on the front axle (kg)	1850	1850	1850	1850	Max permitted weight on the front axle (kg)	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	2000	2000	2000	2000	Max permitted weight on the rear axle (kg)	2000	2000	2000	2000


Wheelbase 4035 mm	Chassis cowl 33				Chassis cowl 35			
	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1340	1355	1355	1405	1340	1355	1355	1405
GVW (kg)	3300	3300	3300	3300	3500	3500	3500	3500
Max permitted weight on the front axle (kg)	1750	1750	1750	1750	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	1900	1900	1900	1900	2000	2000	2000	2000

Wheelbase 4035 mm XL	Chassis cowl 35			
	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	115 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1355	1370	1370	1420
GVW (kg)	3500	3500	3500	3500
Max permitted weight on the front axle (kg)	1850	1850	1850	1850
Max permitted weight on the rear axle (kg)	2000	2000	2000	2000

* Linked to rear view mirrors opt 042 – 2200 mm with opt 036 – 2100 mm with standard rear view mirrors

▲ Kerb weight with supplies, spare wheel, tools and accessories

MAXI CHASSIS COWLS.

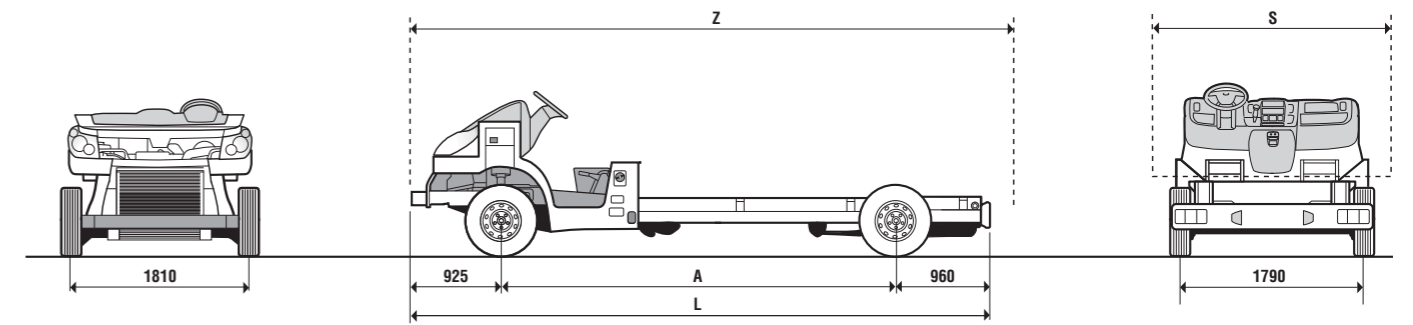

Dimensions mm	Maxi chassis cowl 35				Maxi chassis cowl 40		
	3450	3800	4035	4035 XL	3450	4035	4035 XL
A Wheelbase	3450	3800	4035	4035 XL	3450	4035	4035 XL
L Maximum length	5335	5685	5920	6285	5335	5920	6285
Front track	1810	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790	1790
Front projection	925	925	925	925	925	925	925
Rear projection	960	960	960	1325	960	960	1325
S Max practicable width*	2350	2350	2350	2350	2350	2350	2350
Z Max length with trim	6468	7028	7383	7748	6468	7383	7748

Wheelbase 3450 mm	Maxi chassis cowl 35			Maxi chassis cowl 40		
	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1375	1375	1425	1375	1375	1425
GVW (kg)	3500	3500	3500	4005	4005	4005
Max permitted weight on the front axle (kg)	2100	2100	2100	2100	2100	2100
Max permitted weight on the rear axle (kg)	2400	2400	2400	2400	2400	2400

Wheelbase 3800 mm	Maxi chassis cowl 35			Maxi chassis cowl 40		
	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1385	1385	1435	1385	1385	1435
GVW (kg)	3500	3500	3500	4005	4005	4005
Max permitted weight on the front axle (kg)	2100	2100	2100	2100	2100	2100
Max permitted weight on the rear axle (kg)	2400	2400	2400	2400	2400	2400

Wheelbase 4035 mm	Maxi chassis cowl 35			Maxi chassis cowl 40		
	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1395	1395	1445	1395	1395	1445
GVW (kg)	3500	3500	3500	4005	4005	4005
Max permitted weight on the front axle (kg)	2100	2100	2100	2100	2100	2100
Max permitted weight on the rear axle (kg)	2400	2400	2400	2400	2400	2400

Wheelbase 4035 mm XL	Maxi chassis cowl 35			Maxi chassis cowl 40		
	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Engine versions	130 Multijet	150 Multijet	180 Multijet	130 Multijet	150 Multijet	180 Multijet
Vehicle weight▲(tare) (kg)	1410	1410	1460	1410	1410	1460
GVW (kg)	3500	3500	3500	4005	4005	4005
Max permitted weight on the front axle (kg)	2100	2100	2100	2100	2100	2100
Max permitted weight on the rear axle (kg)	2400	2400	2400	2400	2400	2400

* Linked to rear view mirrors opt 042 – 2200 mm with opt 036 – 2100 mm with standard rear view mirrors

▲ Kerb weight with supplies, spare wheel, tools and accessories

STANDARD EQUIPMENT AND OPTIONS.

NEW DUCATO CHASSIS CABS - CHASSIS COWLS

		Chassis cabs	Chassis cowls
Exterior			
Halogen headlights with double parabolic lens			
Green filter with water in diesel sensor			
Rear crossmember with spare wheel basket and taillights			
Side protection mouldings			
Exterior double arm rear view mirrors with side repeater			
Fuel cap with lock and flap			
Taillights ready for assembly	4EA	•	•
Oversized rear suspensions	4GM	• / Maxi	• / Maxi
Green Michelin "Agilis" tyres	4JE	•	•
Reflective windscreen	4G1	•	•
125 litre tank	4G9	•	•
Increased track (1980 mm)	58G	•	•
Electric wing mirrors + defrosting	041	•	•
External rear-view mirrors for body size kit 2.20 m	036	•	•
External rear-view mirrors for body size kit 2.35 m	042	•	•
Double leaf rear suspensions	077	– (Maxi) /	– (Maxi) /
Fog lights	097	•	•
Headlamp wash wiper	102	•	•
15" and 16" alloy wheels	108/208	•	•
Winter tyres 215/70 R15	141	•	•
Oversize tyres (225/70 15") and (225/75 16")	142	•	•
Rear mud guards	197	•	•
Metallic paintwork	210	•	•
Engine sump protection	237	•	•
Chassis cab with platform	292	•*	•
Electric folding wing mirrors	341	•	•
Cyclist protection bars	358	•	•
Ladder holder + rear screen guard	475	•	•
Self-levelling suspensions	555	•	•
Rear crossmember with lights assembly	742		•
Exclusion of rear lights assembly	745	•	•
Front wheel splash guards	747	•	•
Integrated hub caps	878	•	•
Steel spare wheel	980	•	•
Interior			
Steering column with axial adjustment			
Central glove compartment with lock			
Multifunction dashboard with open compartments, glass holder, coolbox and glove compartment with lock			
Driver's seat adjustable in height			
Cab door panels with electric window controls			
Exclusion of seats		–	
Techno dashboard	6BL	•	•
Seat casing	50E	•	•
Armrest and lumbar support for driver's seat	132	•	•
Upholstered headrests	188	•	•
Two-seater passenger seat with 3 point seat belt for middle passenger	293		–
Adjustable passenger seat + armrest	297	•	•
Leather steering wheel and gear lever knob	320	•	•
Heated passenger seat	452	•	•
Heated driver's seat	453	•	•
Height adjustable passenger seat	454	•	•
Swivel driver's seat	638	•*	•
Sprung driver's seat	640	•	•
Swivel passenger seat	641	•*	•
Faux leather upholstery	727	•	•
Velvet upholstery	728	•*	•
Under-ceiling shelf (capucine)	835	• / chassis maxi 40 and crew cab	•

NEW DUCATO CHASSIS CABS - CHASSIS COWLS


		Chassis cabs	Chassis cowls
Functional / Electrical			
Fiat CODE			
Power steering (with Servotronic on 180 Multijet Power)			
Display with digital clock and Trip computer			
Scheduled servicing			
12V illuminated socket			
Speedometer, electronic rev counter			
Transformer socket and battery setup			
Tempered windows and electric front windows			
Remote central locking		2 buttons	–
Rear heater setup	4N8	•*	•
Rear climate control setup	4GT	•*	•
Oversized alternator (180 Ah)	4WP	• / – (115 Multijet)	• / – (115 Multijet)
Speed limiter (100 km/h)	5BF	•	•
Speed limiter (90 km/h)	58E	• / Maxi 40	• / Maxi 40
Servotronic (variable power steering system)	012	–▲ / ●▲ / ▲	–▲ / ●▲ / ▲
Start&Stop (only on 130 and 150 Multijet)*	5DE	•	•
Setup 4x4	5D8	•*	•*
Manual climate control system	025	•	•
Engine oil level sensor	033	• / 180 Multijet Power	• / 180 Multijet Power
Dusk and rain sensor	051	•	•
"Dead locking" safety locks	064	•	•
Oversized alternator	065	• (only on 115 Multijet)	•
Webasto automatic independent heater	133	•	•
Automatic climate control	140	•	•
Supplementary heater	200	•*	•
Additional Webasto programmable independent heater	205	•	•
Perimeter anti-theft system with antilift function	213	•	•
Non-standard cables	391	•	•
Comfort-Matic automatic robotised gearbox (only on 180 Multijet Power)	407	•	•
Cruise control	416	•	•
Tachograph	650	• / Maxi 40	• / Maxi 40
Daylight device (DRL) - daytime running lights	692	•	•
3-button multifunction remote control	708	•*	•*
Boosted battery (110 Ah)	782	• / 180 Multijet Power	• / 180 Multijet Power
Traction+	941	•	•
Smokers' kit	989	•	•
Safety			
4-sensor ABS + load proportioning valve EBD			
MBA Mechanic Brake Assistance			
3-point seat belts with reel for cab seats			
Height adjustable headrest for cab seats			
ESP (Electronic Stability Program) + LAC (Load Adaptive Control)	392	•	•
Driver air bag	500		•
Front side air bags + window bags	502	•	•
Airbag laterali anteriori + window bag	505	•	•
Audio / Telematics			
Dashboard radio setup (cables)			
Setup for Blue&Me™ TomTom system	68R	•	•
Setup for TomTom without Blue&Me™	6EN	•	•
Setup for radio system with cables, antenna and speakers	082	•	•
Radio antenna integrated in right rear view mirror	5AO	•	•
Blue&Me™	4J3	•	•
Radio with CD and MP3 player	41A	•	•
Radio controls on steering wheel	245	•	•
Pack			
Chassis SX cab pack	6P4	•	•

▲ Not available on 115 Multijet, optional on 130 and 150 Multijet, standard on 180 Multijet Power * Excluding Crew cab ▼ Available soon

■ = Standard • = Optional – = Not available

TECHNICAL GLOSSARY.

Self-levelling suspensions

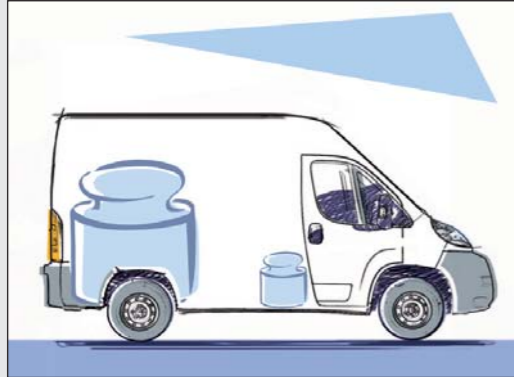


● The vehicle's suspension systems maintain a constant vehicle ride, irrespective of the load and its arrangement, thus increasing safety and driving comfort. The suspensions are controlled by an ECU that acts on the air suspension system. This system allows, when the vehicle is stationary, the raising or lowering of the load platform 70 mm.

Variable assistance power steering




● The system increases driving comfort, making parking manoeuvres as well easier with the vehicle stationary and with a full load. The variable power-assisted steering reduces the effort required to turn the wheel compared with standard power steering. At the same time, it also ensures maximum precision at high speeds by gradually adjusting to the force exerted by the driver.

EBD - Electronic Brake force Distribution

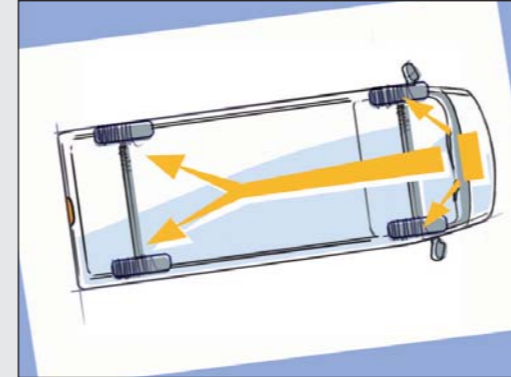


● The electronic system distributes brake force between front and rear axles to optimise efficiency in all driving situations.

MBA - Mechanic Brake Assistance

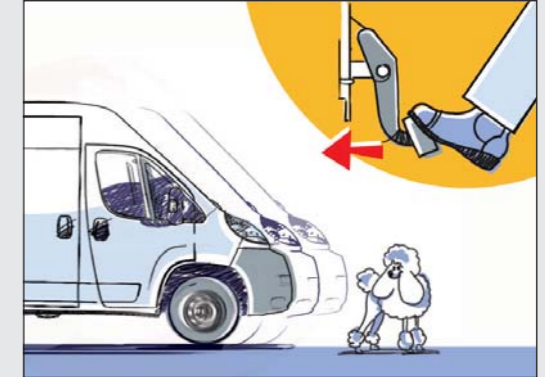


● It automatically increases the pressure in the braking circuit during emergency braking, reducing the stopping distances. The device directly acts on the brake servo. If the vehicle is equipped with ESP, the same function is carried out by the HBA (Hydraulic Brake Assistance).

Reflective windscreen

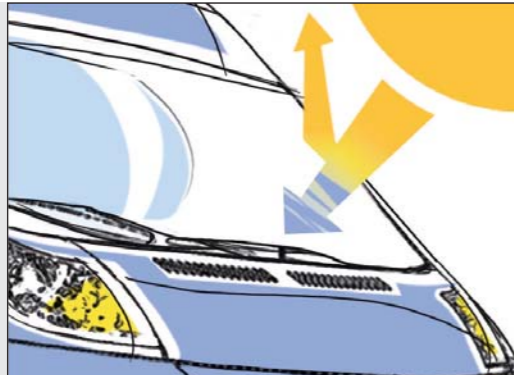


● It contains a fine layer of metal oxides that intercept and reflect the infrared rays that are responsible for overheating the passenger compartment. The reflecting windscreen reduces the burning effect of the sun's rays on the occupants and the temperature inside the passenger compartment with a relevant decrease of air conditioning use and therefore consumption.

Parking sensors

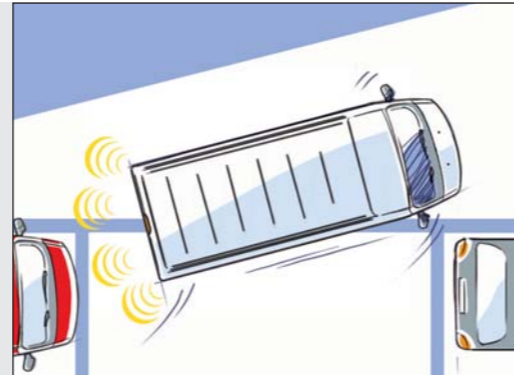


● They notify the driver of the distance between the vehicle and any objects behind the vehicle. The system is activated with the reverse gear engaged and operates with 4 ultrasound sensors. The approach to an object is indicated by an intermittent acoustic signal. A continuous acoustic signal lets you know when you should proceed no further.

ESP - Electronic Stability Program

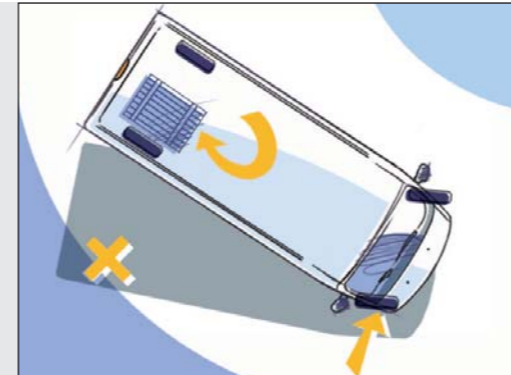

● The system intervenes in emergency situations, for example in sudden swerving manoeuvres to avoid an unexpected obstacle. It monitors parameters such as lateral acceleration, speed, grip and angle of the steering wheel. If necessary, it processes the data, intervenes on the drive torque and braking system to restore perfect stability to the vehicle.

LAC - Load Adaptive Control

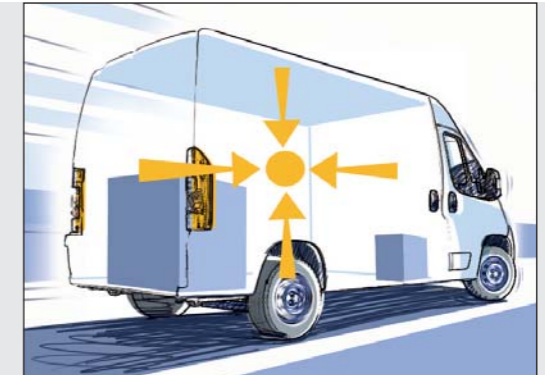


● The Load Adaptive Control integrated into the ESP identifies the vehicle's load conditions during travel, notably the total weight and the centre of gravity. Depending on these parameters, it intervenes by calculating and communicating new readings and intervention thresholds to the ABS, ASR and ESP functions so that these are always as effective as possible.

Start&Stop




● Start&Stop is the system that automatically switches off the engine when traffic conditions require the vehicle to stop, such as red lights, tailbacks and temporary stops. The engine is subsequently switched on by pressing the clutch pedal. Specially designed for driving in the city, it guarantees up to 15% fuel saving, contributing also to reducing emissions.

ABS - Anti-lock Braking System

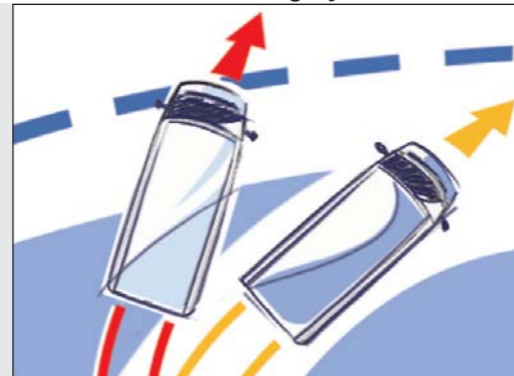

● The system prevents one or more wheels from locking while emergency braking. The device allows the best possible use of the tyre grip thus preventing loss of control of the vehicle.

ASR - Anti Slip Regulation

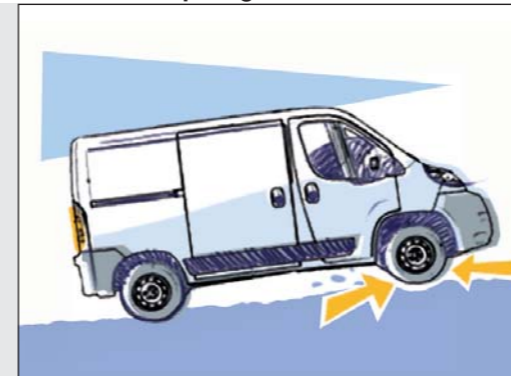

● The system opposes the effects of one or both drive wheels skidding in case of poor grip by intervening on the brakes or temporarily reducing the power supplied by the engine.

TRACTION+



● Traction+, present on vehicles with ESP, is the innovative traction control system that improves the vehicle's handling on difficult terrain with poor grip. Under conditions of low or zero grip from any drive wheel, the control unit detects slip and brakes it, transmitting the drive torque on the wheel with greater grip on the ground. In this way, the vehicle's performance is more comfortable, ensuring the best stability and handling.

SERVICES.

Customers who choose a Fiat commercial vehicle know that they can count on a vehicle that is technologically innovative with state-of-the-art safety but also on a world of solutions and services designed to meet all the transport needs.

WARRANTY SERVICES



24 months of warranty with unlimited mileage. Roadside assistance throughout Europe. Breakdown coverage in the event of breakdown or accident. Towing vehicle to brand workshop. Return of passengers or continuation of journey. Hotel expenses. Courtesy car in the event of a fault. Recovery of repaired vehicle. Sending parts abroad.



Total Service is a comprehensive maintenance package that enables you to work and grow your business without worries. Discover the best way to keep your vehicle in perfect shape, prevent situations where your vehicle is off the road and free yourself of any concern.

Includes:

- extension of contractual warranty up to 60 months;
- scheduled services, including all restorations and replacements set out in the usage and owner handbook;
- free replacement of parts damaged by wear due to normal* vehicle use with Original Parts;
- roadside assistance and the advantages already included in the first 24 months of the vehicle's life will be extended up to the fifth year: towing, mobile workshop, medical health assistance and intervention even in the most common unforeseen circumstances such as running out of fuel, using the incorrect fuel, flat battery, tyre puncture, key breakage/loss.

* The replacements provided are those specific to the mileage option chosen by the customer.



The Fiat Professional 5 Stelle warranty package extends the benefits of the contractual warranty. It includes two time-scale options of 3 or 5 years and three different mileage options (90,000/120,000/180,000 km). Fiat Professional 5 Stelle will entitle you to all the services offered by the 2+ warranty, plus extension of the warranty on paintwork factory defects.

Fiat Professional InTempo - InForma Fiat Professional

Do you want to preserve the performance of your commercial vehicle by ensuring it is correctly serviced? Choose the **InTempo** package, offering you the possibility of purchasing 2 to 5 **programmed maintenance** services in advance, or the **InForma** package with four different **extraordinary maintenance** solutions, each including correct replacement of parts most subject to wear (brake pads, brake discs, windscreen wiper blades, clutch kit, etc). The advantages are immediate and identical whichever mileage option you choose: **a 20% saving on the list price of original parts and the guarantee of qualified labour at any Fiat Professional service outlet.**

ASSISTANCE AND CUSTOMER RELATIONS SERVICES



CIAO FIAT, Assistance and Customer Relations Services

Call the freephone* number 00 800 342 800 00 and access all the services created by Fiat Professional for you:

Roadside Assistance (24 hours a day, 365 days a year)
For: towing and breakdown call-outs in the event of faults and accidents; information on the service network; free passenger return services (or continuation of journey); hotel expense payment; recovery of repaired vehicle; cash advances; parts dispatch.


Information (from Monday to Saturday from 8 AM to 8 PM)
For everything that you want to know about our models (versions, optional extras, promotions, prices), our services and the dealerships and book a test drive at one of our dealerships.

Customer relations services (from Monday to Saturday from 8 AM to 8 PM)
To respond to all your needs or requests concerning your vehicle and our services.

* The call is free from landlines and mobile networks. In some European countries a fee is charged to the caller by some mobile networks depending on the tariff applied by operators.

FINANCIAL SERVICES

However you choose to experience mobility, SAVA satisfies your needs with financial and leasing packages combined with exclusive insurance services.



Instalment Classic instalment finance that allows you to spread the payment of all or part of your new car for a period ranging from 12 to 72 months or part of your used car for a period ranging from 12 to 60 months.

Leasing If you are a tradesperson, freelance worker or run your own business, this is the best solution for you because it offers you the option of using your car without owning it and tying up your capital: effective planning of incomings and goings and a choice of contract duration (from 42 to 60 months) and of the advance plus a flexible final redemption value.

HIRE SERVICES

Long-term hire is the ideal solution for companies and professionals who want to benefit from and appreciate all the advantages of their new vehicle without the burden of ownership and the duties that this involves.

Long-term hire offers tangible benefits:

- freeing yourself from the burdens of car management,
- simplifying administrative management: single payment for more power,
- making recourse to a partner that is qualified and an expert in managing operating costs of a vehicle fleet,
- flexible vehicle fleet management formula: possibility of contractual amendments,
- customisations of the hire services to the customer's needs,
- direct cost known from the beginning and planned over the entire period,
- no tying up of capital,
- deduction of the instalment according to business class and vehicle use.

For information contact your Dealership or visit the www.savarent.it website.



INSURANCE SERVICES*

Marking Protection System for marking your vehicle for anti-theft and identification purposes; Fire & Theft policy; throughout the duration of the contract, it is possible to include full coverage in the event of theft, fire, robbery, natural events, socio-political events and acts of vandalism; F/I and KASKO policy: the F/I Policy coverage can also be combined with the exclusive KASKO policy including damage reimbursement in the event of collision with another vehicle, impact against fixed and moving obstacles, rollover or leaving the road. These insurance services are financed at a rate of zero interest throughout the duration of the contract.

Protected Loan Protected Loan This is a flexible insurance service included in the SAVA finance/ leasing package, that frees you from the commitment of paying the residual debt or part of the monthly deposits due if unexpected and sudden events occur.

* Within the limits laid down by policy conditions and save the exclusions indicated. For more information, call the Contact Centre 199.818.203 (from Monday to Friday from 8 AM to 6 PM) or visit the www.sava.it website

SPECIAL SALES PROGRAMMES

Customised mobility solutions? Autonomy is aimed at people with reduced motor abilities and proposes specific trim levels for passenger transport vehicles, roadside assistance and financial services. It also offers comprehensive assistance in obtaining a special driving licence from Mobility Centres. Call the freephone number 800-838333 to obtain full and complete information based on your needs.

